Selected work

Print & digital

Catalogues, brochures and social media design.
A selection of commercial design work.

Zenith

Retail shelving systems

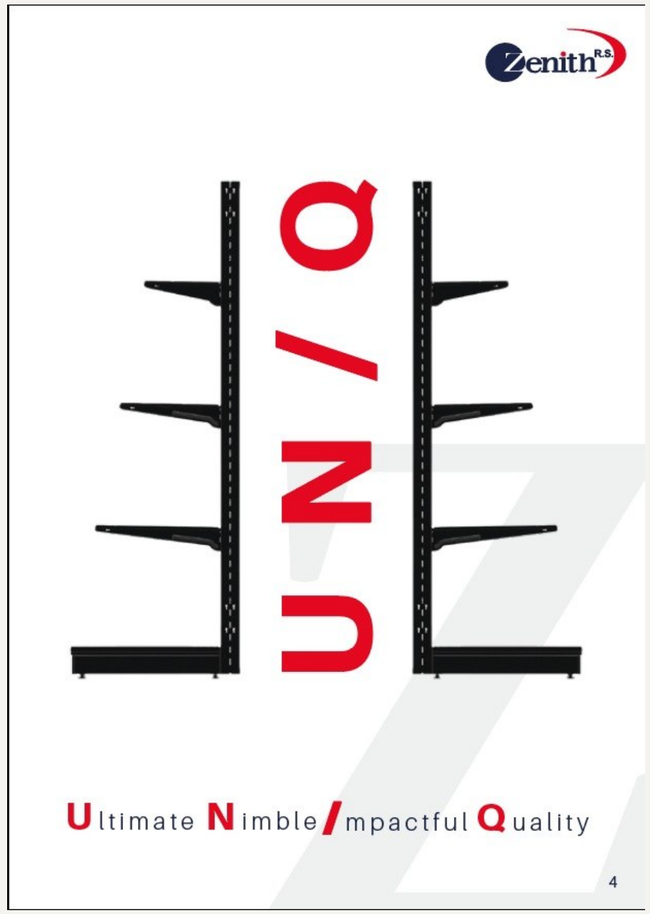



Product imagery introduces the shelving range and its retail setting.

Zenith

Product configurations and component details

Shelving Configurations



Wall shelving with
UN/Q Single Backpanel

Wall minirack with
UN/Q Single Backpanel



3

Upright





UN/Q
Perforation For
Single Backpanel
System



25 mm
Perforation
Pitch

Profile Section

60x30	Height
80x30	1000-3300 mm
100x30	

7

Base



Height **110 mm**
Depth **300** - **1000 mm**
Plastic or Metal Feet

Backpanel



Double Backpanel



UN/Q Single Backpanel

Height: **100, 200 mm**
Lenght: **650, 700, 900, 915,1000,1250,1330 mm**

8

İkomak

Product information, clearly organised

Catalogue design for an
industrial filtration range.
Soft blue graphics connect
the covers with the product imagery.





İkomak

Product photography, diagrams and specifications share a consistent page structure.

IKOMAK 3P SINGLE EMPTY HOUSINGS

IKOMAK 3P Housings are suitable for all existing standard production 5"-10"-20" filters. In waters at 4°C-45°C, It is used in all filters for filtration purposes. It is produced from quality and durable materials.



5" SINGLE EMPTY HOUSING | 10" SINGLE EMPTY HOUSING | 20" SINGLE EMPTY HOUSING

Dimensions (mm)

Product Code	Product Description	Input Output	A	B	C
İKO-F-805	5" SINGLE EMPTY HOUSING	3/4"	195	123	120
İKO-F-905	5" SINGLE EMPTY HOUSING	1"	195	123	120
İKO-F-1005	5" SINGLE EMPTY HOUSING	1 ¼"	245	141	130
İKO-F-1105	5" SINGLE EMPTY HOUSING	1 ½"	245	141	130
İKO-F-1205	5" SINGLE EMPTY HOUSING	2"	245	141	130
İKO-F-810	10" SINGLE EMPTY HOUSING	3/4"	320	123	120
İKO-F-910	10" SINGLE EMPTY HOUSING	1"	320	123	120
İKO-F-1010	10" SINGLE EMPTY HOUSING	1 ¼"	363	141	130
İKO-F-1110	10" SINGLE EMPTY HOUSING	1 ½"	363	141	130
İKO-F-1210	10" SINGLE EMPTY HOUSING	2"	363	141	130
İKO-F-820	20" SINGLE EMPTY HOUSING	3/4"	575	123	120
İKO-F-920	20" SINGLE EMPTY HOUSING	1"	575	123	120
İKO-F-1020	20" SINGLE EMPTY HOUSING	1 ¼"	615	141	130
İKO-F-1120	20" SINGLE EMPTY HOUSING	1 ½"	615	141	130
İKO-F-1220	20" SINGLE EMPTY HOUSING	2"	615	141	130

Accessory: bracket, key

Work conditions

Maximum working pressure: 6 bar (87 psi)
Maximum operating temperature _____45°C (113°F)
Minimum operating temperature _____4°C (39.2°F)

Features

Suitable for General Use and Drinking Water.
Head and Clamping Sleeve: ABS
Jar: SAN O-ring: EPDM Input/Output: Brass NPT

www.ikomak.com.tr

İKOMAK 3P SINGLE BOTTOM EMPTY BODY

IKOMAK 3P Housings are suitable for all existing standard production 5"-10"-20" filters. In waters at 4°C-45°C, It is used in all filters for filtration purposes. It is produced from quality and durable materials.



10" SINGLE BOTTOM EMPTY HOUSING | 20" SINGLE BOTTOM EMPTY HOUSING

Dimensions (mm)

Product Code	Product Description	Input Output	A	B	C
İKO-F-AT-810	10" SINGLE BOTTOM EMPTY HOUSING	3/4"	232	123	120
İKO-F-AT-910	10" SINGLE BOTTOM EMPTY HOUSING	1"	232	123	120
İKO-F-AT-1010	10" SINGLE BOTTOM EMPTY HOUSING	1 ¼"	366	141	130
İKO-F-AT-1110	10" SINGLE BOTTOM EMPTY HOUSING	1 ½"	366	141	130
İKO-F-AT-1210	10" SINGLE BOTTOM EMPTY HOUSING	2"	366	141	130
İKO-F-AT-820	20" SINGLE BOTTOM EMPTY HOUSING	3/4"	578	123	120
İKO-F-AT-920	20" SINGLE BOTTOM EMPTY HOUSING	1"	578	123	120
İKO-F-AT-1020	20" SINGLE BOTTOM EMPTY HOUSING	1 ¼"	618	141	130
İKO-F-AT-1120	20" SINGLE BOTTOM EMPTY HOUSING	1 ½"	618	141	130
İKO-F-AT-1220	20" SINGLE BOTTOM EMPTY HOUSING	2"	618	141	130

Accessory: bracket, key

Work conditions

Maximum working pressure: 6 bar (87 psi)
Maximum operating temperature _____45°C (113°F)
Minimum operating temperature _____4°C (39.2°F)

Features

Suitable for General Use and Drinking Water.
Head and Clamping Sleeve: ABS
Jar: SAN O-ring: EPDM Input/Output: Brass NPT

www.ikomak.com.tr

IKOMAK ANTI-LIME MACHINE FILTER

It is an effective and cost-effective method to prevent the damages of calcareous water in heating appliances such as washing machines, dishwashers and water heaters. Silifose (Polyphosphate) crystals in the filter bowl prevent the lime-forming Ca and Mg ions in the water from adhering and accumulating on their surfaces. It provides ease of connection to the cold water faucet spout. It is practical. It doesn't take up space.



WASHING-DISHWASHER ANTI-LIME

Dimensions (mm)

Product Code	Product Description	Input Output	A	B	C
İKO-F-200	WASHING-DISHWASHER ANTI-LIME	1/2"	135	70	70
İKO-F-100	WASHING-DISHWASHER ANTI-LIME	3/4"	135	70	70

Work conditions

Maximum working pressure: 6 bar (87 psi)
Maximum operating temperature _____45°C (113°F)
Minimum operating temperature _____4°C (39.2°F)

Features

Suitable for General Use and Drinking Water.
Head and Clamping Sleeve: ABS
Jar: SAN O-ring: EPDM Input/Output: Brass NPT

IKOMAK COMBI FILTER

Solar Energy systems are an effective and cost-effective method to prevent the damage of calcareous water in heating appliances such as combi boilers. Silifose (Polyphosphate) crystals in the filter bowl prevent the lime-forming Ca and Mg ions in the water from adhering and accumulating on their surfaces. With the 50 µ washable filter at the filter bowl inlet, sediments are prevented. It provides ease of connection to the cold water faucet spout. It is practical. It doesn't take up space.





ANTI-LIME COMBI FILTER MAT



ANTI-LIME COMBI FILTER TRANSPARENT

Dimensions (mm)

Product Code	Product Description	Input Output	A	B	C
İKO-F-100	ANTI-LIME COMBI FILTER	1/2"	265	100	85

Work conditions

Maximum working pressure: 6 bar (87 psi)
Maximum operating temperature _____45°C (113°F)
Minimum operating temperature _____4°C (39.2°F)

Features

Suitable for General Use and Drinking Water.
Head and Clamping Sleeve: ABS
Jar: SAN O-ring: EPDM Input/Output: Brass NPT

www.ikomak.com.tr

IKOMAK 3P SINGLE FILTRATION

IKOMAK 3P Housings are suitable for all existing standard production 5"-10"-20" filters. Options can be selected and used as full. In waters at 4°C-45°C, in all filters for filtration purposes is used. It is produced from quality and durable materials.



WASHABLE WITH CARTRIDGE FILTER | WITH LIME CRUSHER WASHABLE CARTRIDGE FILTER | LIME CRUSHER WITH CARTRIDGE FILTER | ACTIVE CARBON WITH CARTRIDGE FILTER | ROSIN WITH CARTRIDGE FILTER

*Images are 10" Single Filter images.

Dimensions (mm)

Product Code	Product Description	Input Output	A	B	C
İKO-F-405-YI	5" SINGLE WASHABLE CARTRIDGE FILTER	3/4" - 1"	195	123	120
İKO-F-406-YK	5" SINGLE LIME REMOVAL WASHABLE CARTRIDGE FILTER	3/4" - 1"	195	123	120
İKO-F-605-KK	5" SINGLE SCALE REMOVAL CARTRIDGE FILTER	3/4" - 1"	245	141	130
İKO-F-505-AK	5" SINGLE ACTIVATED CARBON CARBON CARTRIDGE FILTER	3/4" - 1"	245	141	130
İKO-F-705-RÇ	5" SINGLE RESIN CARTRIDGE FILTER	3/4" - 1"	245	141	130
İKO-F-410-YI	10" SINGLE WASHABLE CARTRIDGE FILTER	3/4" - 1"	320	123	120
İKO-F-416-YK	10" SINGLE LIME REMOVAL WASHABLE CARTRIDGE FILTER	3/4" - 1"	320	123	120
İKO-F-610-KK	10" SINGLE SCALE REMOVAL CARTRIDGE FILTER	3/4" - 1"	363	141	130
İKO-F-510-AK	10" SINGLE ACTIVATED CARBON CARBON CARTRIDGE FILTER	3/4" - 1"	363	141	130
İKO-F-710-RÇ	10" SINGLE RESIN CARTRIDGE FILTER	3/4" - 1"	363	141	130
İKO-F-420-YI	20" SINGLE WASHABLE CARTRIDGE FILTER	3/4" - 1"	575	123	120
İKO-F-426-YK	20" SINGLE LIME REMOVAL WASHABLE CARTRIDGE FILTER	3/4" - 1"	575	123	120
İKO-F-620-KK	20" SINGLE SCALE REMOVAL CARTRIDGE FILTER	3/4" - 1"	615	141	130
İKO-F-520-AK	20" SINGLE ACTIVATED CARBON CARBON CARTRIDGE FILTER	3/4" - 1"	615	141	130
İKO-F-720-RÇ	20" SINGLE RESIN CARTRIDGE FILTER	3/4" - 1"	615	141	130
İKO-F-410-YI-2	10" SINGLE WASHABLE CARTRIDGE FILTRATION	1 ¼" - 1 ½" - 2"	363	141	141
İKO-F-416-YK-2	10" SINGLE LIME CRUSH WASHABLE CARTRIDGE FILTRATION	1 ¼" - 1 ½" - 2"	363	123	120
İKO-F-610-KK-2	10" SINGLE LIME CRUSHING CARTRIDGE	1 ¼" - 1 ½" - 2"	363	141	130
İKO-F-510-AK-2	10" SINGLE ACTIVATED CARBON CARBON CARTRIDGE FILTRATION	1 ¼" - 1 ½" - 2"	363	141	130
İKO-F-710-RÇ-2	10" SINGLE RESIN CARTRIDGE FILTRATION	1 ¼" - 1 ½" - 2"	363	141	130
İKO-F-420-YI-2	20" SINGLE WASHABLE CARTRIDGE FILTRATION	1 ¼" - 1 ½" - 2"	363	141	141
İKO-F-426-YK-2	20" SINGLE LIME CRUSH WASHABLE CARTRIDGE FILTRATION	1 ¼" - 1 ½" - 2"	363	123	120
İKO-F-620-KK-2	20" SINGLE LIME CRUSHING CARTRIDGE FILTRATION	1 ¼" - 1 ½" - 2"	363	141	130
İKO-F-520-AK-2	20" SINGLE ACTIVATED CARBON CARBON CARTRIDGE FILTRATION	1 ¼" - 1 ½" - 2"	363	141	130
İKO-F-720-RÇ-2	20" SINGLE RESIN CARTRIDGE FILTRATION	1 ¼" - 1 ½" - 2"	363	141	130

Work conditions

Maximum working pressure: 6 bar (87 psi)
Maximum operating temperature _____45°C (113°F)
Minimum operating temperature _____4°C (39.2°F)

Features

Suitable for General Use and Drinking Water.
Head and Clamping Sleeve: ABS
Jar: SAN O-ring: EPDM Input/Output: Brass NPT

www.ikomak.com.tr

Femibloom

Healthcare communication

BROCHURE DESIGN





A coordinated palette connects the product, lifestyle photography and supporting information.

Femibloom

A complete brochure spread

BENZERSİZ ANTİOKSİDAN

ALFA LİPOİK ASİT

Miyo Inositol + **Alfa Lipoik Asit** + Folik Asit Kombinasyonu ile
Daha yüksek implantasyon oranı, Daha yüksek klinik gebelik oranı.

Alfa Lipoik Asit diğer antioksidanlardan farklı olarak **hem suda hem de yağda çözünür.**
Bu sayede;
-Hücrenin tüm bölgelerinde çalışır.
-Oksidatif stresle etkili mücadele.
-Gelişmiş hücresel koruma ve fonksiyona katkı.
-Yüksek kaliteli yumurtaların üretimine yardımcı
-İnsülin duyarlılığını arttırarak ,PKOS semptomlarını azaltmaya ve doğurganlığı arttırmaya yardımcı olur.

	MI+ALA+FA (n = 20)	MI+ALA+FA (n = 20)	p
Transfer edilen embriyolar (n)	30	28	
İmplantasyon oranı (%)	33.3 (10/30)	10.7 (3/28)	<0,05
Klinik gebelik oranı (CPR) (%)	45 (9/20)	15 (3/20)	<0,05
Devam eden gebelik oranı (OPR) (%)	35 (7/20)	0 (0/20)	-
Canlı doğum oranı (cLBR) (%)	35 (7/20)	0 (0/20)	-



Normal hücre | Hücreye saldıran serbest radikaller | Oksidatif stres altındaki hücre

Femibloom Morning

İnositol
Sabah alındığında , gün boyunca kan şekeri seviyelerini düzenlemeye yardımcı olarak, iştahın kontrol edilmesine yol açabilir.

Koenzim Q10
Sabah alınması, akşam alındığında görülen uyku sorunlarına neden olmaz ve migren gibi sağlık sorunlarını hafifletmek için sabah saatlerinde alımı daha uygun olabilir.

Astaksantin
Genellikle sabah alınması önerilmektedir. Bunun sebebi, yemekle birlikte alınan yağların, astaksantin emilimini artırmasıdır.

D vitamini
Gece alımı doğal uyku hormonu olan melatonin üretimini olumsuz etkileyebildiği için sabah alınması önerilir.

B Vitamini
Sabah saatlerinde, güne başlarken alınması besin metabolizması ve enerji üretimine daha olumlu etki sağlar ve gün içerisinde daha enerji dolu hissetmeye yardımcı olur.



Femibloom Evening

E Vitamini
Enerji tüketiminin en az düzeye indiği akşam saatlerinde alındığında yapıcı özellikleri ortaya çıkar.

Resveratrol
Genç yetişkinlerde akşam alındığında sirkadiyen ritmi düzenleyerek, derin uykuyu engelleyebilecek iltihabı azaltır, uykuyu iyileştirebilir, DNA ve hücre onarımına destek olur..

Selenyum
Akşam alınması sirkadiyen ritim üzerindeki rolü nedeniyle uyku kalitesini desteklemek için yararlı olabilir.

L Arjinin
Akşam alınması, büyüme hormonu seviyelerini daha fazla artırarak, uykunun ve artan büyüme hormonunun faydalarını. yükseltir.

C Vitamini
Akşam alındığında oksidatif stresi azaltma ve genel uyku kalitesini arttırmada daha yararlı olabilir.

Pregnabloom

BROCHURE DESIGN

Product imagery and information in a coordinated visual style





The brochure balances a prominent opening image with a structured product information spread.

Webagron

SOCIAL MEDIA DESIGN

Visual concepts for food and water awareness





Webagron

Social visuals for agricultural media and event coverage





Hekagro

Product communication for agriculture







Yiva

Olive oil brand content

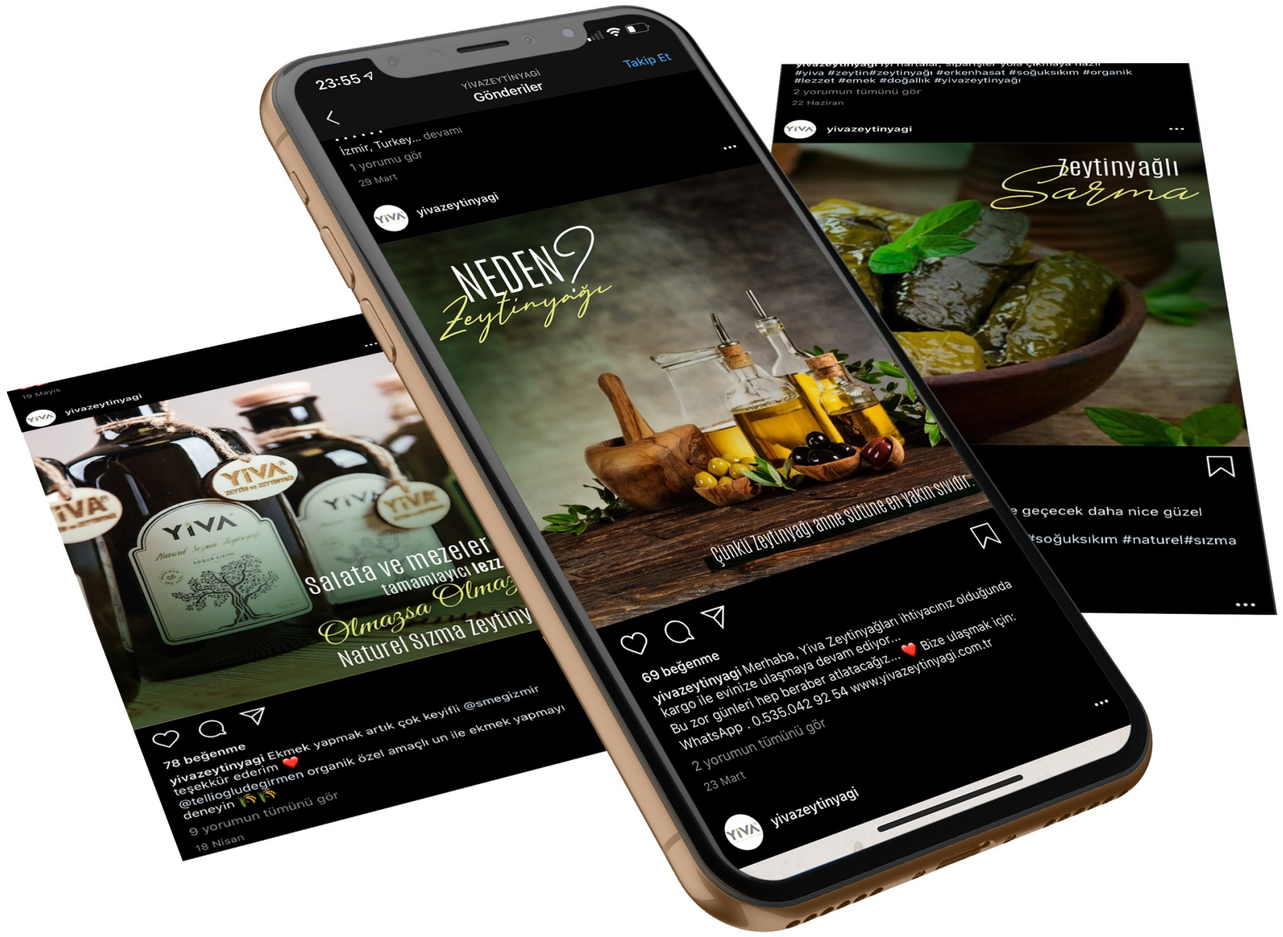

Let’s talk about design

Yaren Zeynep Erdal

Graphic Designer

yzerdal@gmail.com